



### Features:

- Available in 12VDC or 24VDC
- Low current consumption
- Separate screw terminals to maintain monitoring integrity
- Rear cable access
- Mountings for BESA round J & AFB back box
- Isolation diode fitted

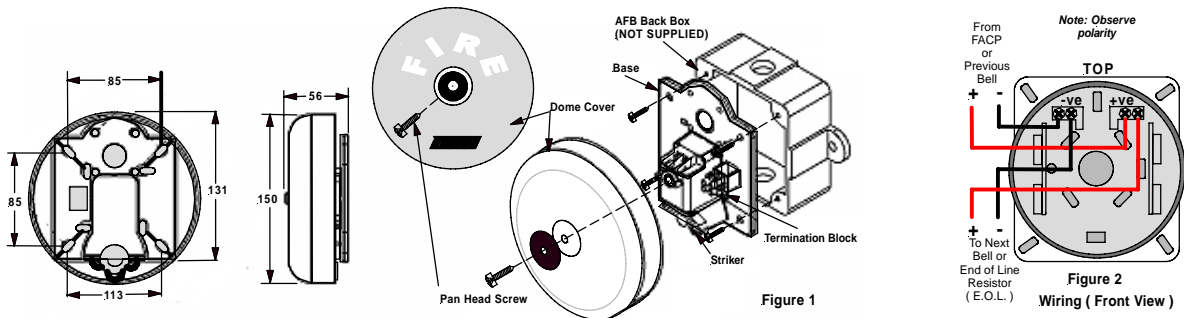

**Installation of Ampac 150mm Fire Alarm Bell**

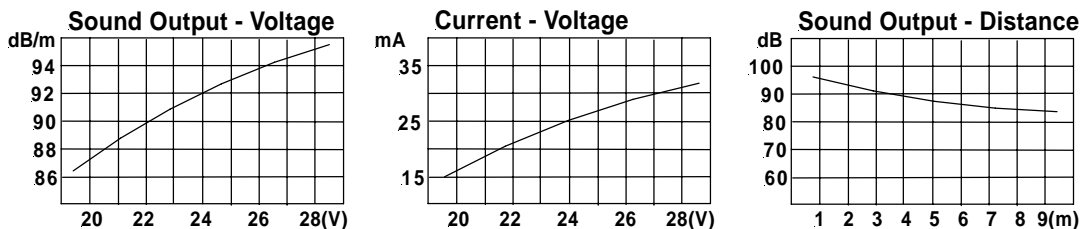

**Performance Graphs of Ampac 150mm Fire Alarm Bell**

### Description

The AMPAC 150mm Motorised Bell is maintenance free with built in diode for the minimisation of any possible EMC considerations.

Bells are red and available in 12 or 24 VDC versions.

Once DC power is applied to the bell, the motorised bell will operate resulting in the activation of the audible warning. Removing DC power deactivates the bell.

Loop in/out termination is provided for easy installation.

### Specifications

Item Number	206-0011	206-0012
<b>Gong Size</b>	150mm	150mm
<b>Gong Material / Colour</b>	Steel/Red	Steel/Red
<b>Housing Material / Colour</b>	ABS/Red	ABS/Red
<b>Operating Voltage</b>	12VDC +/- 20%	24VDC +/- 20%
<b>Operating Current</b>	55mA	25mA
<b>Operating Temp</b>	-10° to +55°C	-10° to 55°C
<b>IP rating</b>	Indoor use	Indoor use
<b>Sound Output Level</b>	95dB @ 1m 92dB @ 3m	95dB @ 1m 92dB @ 3m
<b>Weight</b>	764 grams	764 grams